


RIM GmbH

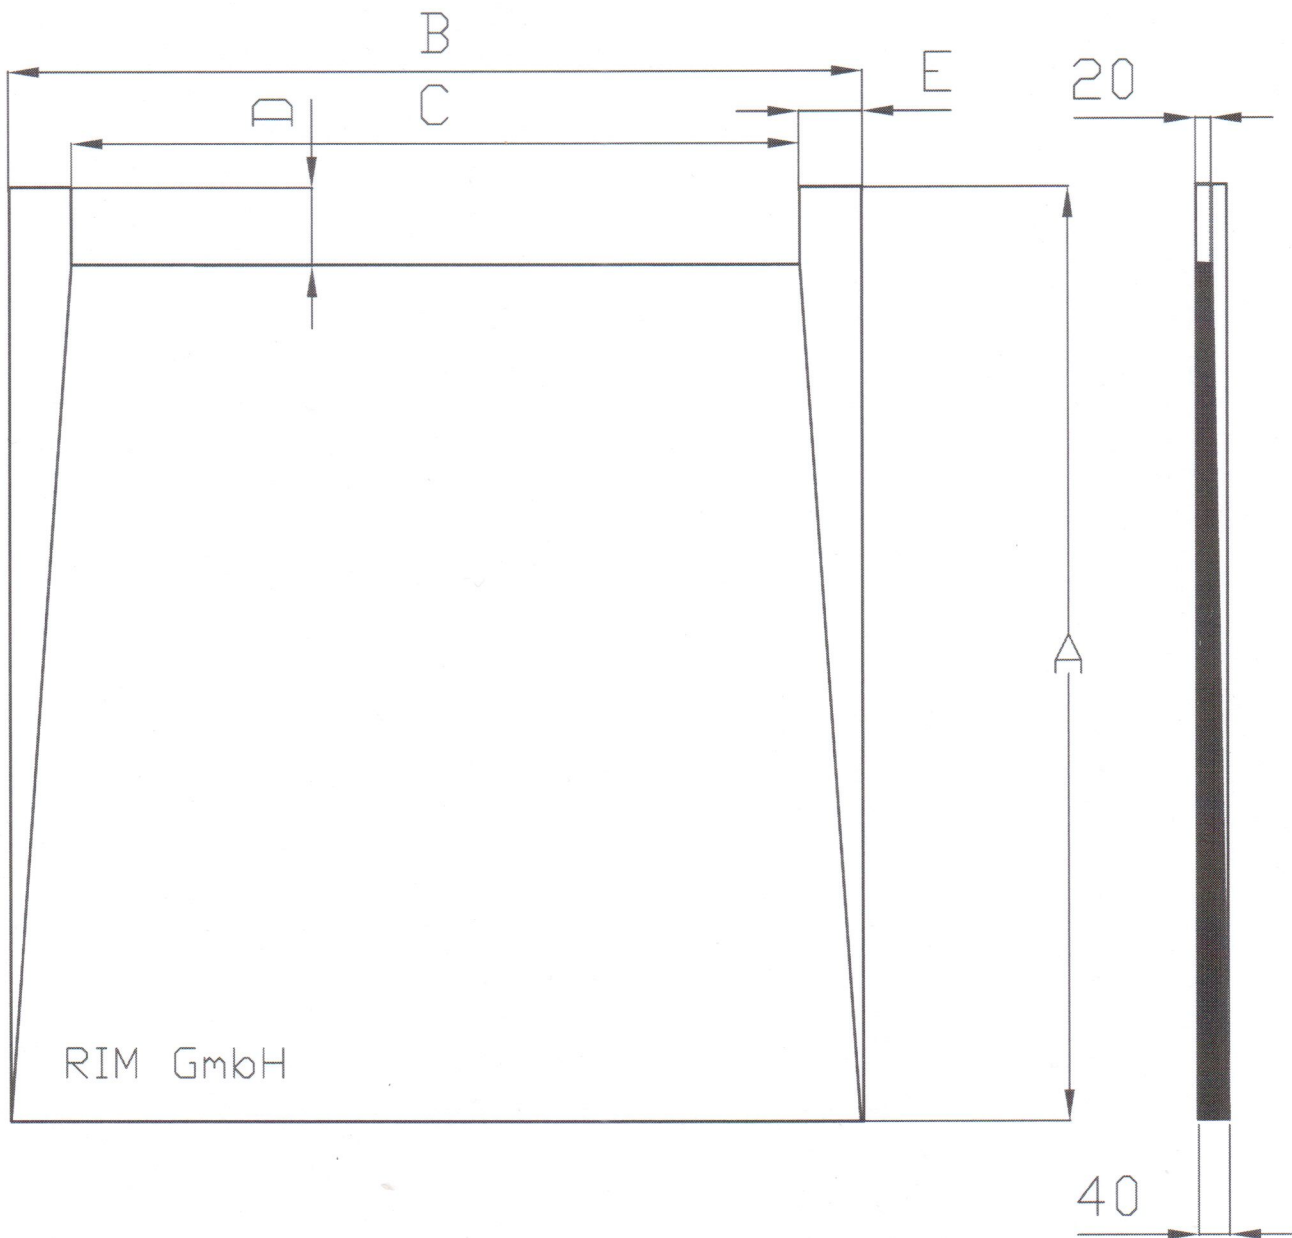

Typ U

	min	max	soll
A	800	1600	
B	800	1200	
C	-	-	
D	-	-	
E	80		